

VENTED INSERT FIREPLACES



 Monessen

# WARM WELCOME

Nothing invites or delights like the dancing flames of a fire. For thousands of years fire has been the focal point of hearth and home and, like so many families before, we invite you to sit by ours and enjoy their warmth and beauty.



ILDV20 shown with Black  
Texture Beveled surround



ILDV20 shown with Black  
Textured Beveled surround

## REVEAL DIRECT VENT INSERT SYSTEMS

### ILDV20 & ILDV30

It's easy to turn an old inefficient masonry fireplace into a cozy cost-effective heat source with a direct vent insert from Monessen. Our Reveal inserts are the perfect choice. With a large viewing area, up to 30,000 BTUs and a host of sensible options, the Reveal will show you just what a fireplace can do for your home. Standard features include Cottage Clay firebrick, a variable thermostat controlled forced air blower and Natural Flame™ burner with a strikingly realistic fiber ceramic log set. The control valve is conveniently located on the outside of the box for easy access and maintenance. Two styles and colors of designer facings make these units a perfect fit for any room.

## IDV DIRECT VENT INSERT SYSTEMS

### IDV380C & IDV490C

Available in two sizes, the IDV380C and IDV490C both feature standard black filigree trim and Cottage Clay firebrick to create an upscale, custom look. With large viewing areas from 382 to 492 square inches, BTUs ranging from 20,500 to 40,000 and a variety of optional accessories, our vented inserts from Monessen are the perfect fit for your home.



IDV490C shown with optional  
42/29 Flat surround



IDV380C shown with optional  
Black Beveled surround



IDV380C shown with optional  
Gold door frame

IDV380C shown with optional  
Brushed Pewter door frame

## STANDARD FEATURES FOR ILDV20 & ILDV30:


- Clean face design
- Natural Flame™ burner with fiber ceramic log set
- 3" intake and 3" exhaust vent pipe connectors for chimney flex liners
- Thermostat blower (160 cfm) standard
- 18" flex line with On/Off shut-off valve
- Cottage Clay firebrick

## STANDARD FEATURES FOR IDV380C & IDV490C:

- Seven piece ceramic fiber logs featuring a patented Natural Flame burner with random dancing flames and large ember bed
- Millivolt with on/off switch and variable flame height control in natural gas or propane gas
- Removable unitized black louver assembly for ease of installation
- Optional firebrick and faces available
- Natural or propane field convertible
- Flexible connector with On/Off shut off valve included
- Consumer friendly deluxe control panel with on/off switch
- Thermostat controlled blower
- Cottage Clay firebrick

## Optional Accessories

### IDV380C & IDV490C Trims and Surrounds

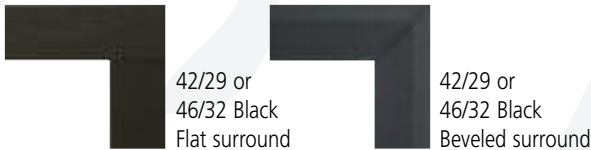

Cabinet doors, door frames and filigree panels



Gold filigree panel, door frame and fire screen doors

Brushed Pewter filigree panel, door frame and fire screen doors

Trims available to mix and match to achieve a custom look.

Thermostat ON/OFF remote control with 3-step flame height adjustment and 3-speed blower control with receiver



Touch Light™ table top/wall mount TLM on/off and TLT thermostat remote control with receiver



Programmable wireless wall thermostat with receiver

See our Ambient Technologies® catalog for a complete line of remotes and thermostats.

### ILDV20 & ILDV30 Surrounds



Colonial and Beveled surrounds offered in Iron Age and Black Texture. Colonial surround features cast iron 4 3/4" mantel shelf.



On/Off shut-off valve with easy access panel conveniently located on side of the firebox for ILDV20 & ILDV30

Cottage Clay firebrick



## Specifications

Model	ILDV20	ILDV30
BTU	20,000 NG and LP	30,000 NG and LP
FE Ratings (Cdn. Fireplace Efficiency)	67.5% NG / 73.9% LP	71.9% NG / 83.7% LP
Dimensions (Actual)	30 1/4"W x 17 7/8"H x 16 5/8"D	34 3/8"W x 20 3/4"H x 17 5/8"D
Opening Dimensions	22 1/2"W (Front Width) x 18"H x 14"D x 15 1/8" (Rear Width)	28"W (Front Width) x 21"H x 16"D x 20" (Rear Width)
Viewing Area	280 sq.in.	409 sq.in.
Design Certified	CSA	CSA
Model	IDV380C	IDV490C
BTU	20,500 - 30,500 (NG) 22,000 - 28,000 (LP)	26,500 - 40,000 (NG) 29,000 - 37,500 (LP)
FE Ratings (Cdn. Fireplace Efficiency)	69.6% NG / 66.2% LP	69.8% NG / 67.2% LP
Dimensions (Actual)	30 3/16"W x 22 3/4"H x 16 5/16"D	33 11/16"W x 24 3/4"H x 18 5/16"D
Opening Dimensions	28"W x 21"H	31"W x 23"H
Viewing Area	382 sq.in.	492 sq.in.
Design Certified	CSA	CSA

Cover image—ILDV30 shown with optional Iron Age Colonial surround.



# Monessen

A Brand of Monessen Hearth Systems Co.  
149 Cleveland Drive, Paris, Kentucky 40361

[www.monessenhearth.com](http://www.monessenhearth.com)

Your Monessen Dealer:

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. © 2009 Monessen Hearth Systems Co.

Ver.03 MON8408